



TECHNICAL MANUAL

Time relay RT-SBB

one shot EKF

1 DESCRIPTION

Time relay RT-SBB EKF is an electronic switching device with an adjustable time setting. The relay is designed to provide a pulse of the selected duration when the relay is activated. Timer can be adjusted using the dials on the front panel of the relay.

The time relay complies with IEC 61000-4-4, IEC 60947-5-1.

The relay can be used in industrial and household automation, e.g. in HVAC and lighting systems.

2 TECHNICAL DATA

Table 1

Characteristics	Values			
Item code	RT-SBB	RT-SBB-2	RT-SBB-12-240	RT-SBB-12-240-2
Rated voltage, V	24-240 AC/DC		12-240 AC/DC	
Rated pulse voltage, V AC	400			
Power consumption	AC: ≤1,5 VA; DC: ≤1 W			
Time delay range	0,1 sec. to 10 days			
Set-point accuracy, %	≤5			
Repeatability, %	≤0,2			
Power interruption, ms	min 200			
Electrical endurance, cycles	100 000			
Mechanical endurance, cycles	1 000 000			
Number of switching contacts	1	2	1	2
Rated load current	8A at 230 V, AC-1			
Interference immunity	3 in accordance with IEC 61000-4-4			
Max. altitude above sea level, m	2000			

Table 1 continued

Characteristics	Values			
	RT-SBB	RT-SBB-2	RT-SBB-12-240	RT-SBB-12-240-2
Degree of protection	IP20			
Pollution degree	3			
Operating temperature, °C	-5 to 50			
Storage temperature, °C	-25 ... 75			
Connection	Screw terminals, max. conductor cross-section 2,5 mm ²			
Tightening torque, N*m	0,5			
Mounting	35 mm DIN rail			


Indication

Green "U" LED: constantly lit when the relay is powered.


Red "φ" LED:

- Timer countdown - flashes.
- The relay is on, contacts 15-18 (25 - 28) are closed - lit.
- The relay is off, contacts 15-18 (25-28) are open - not lit.

Control panel

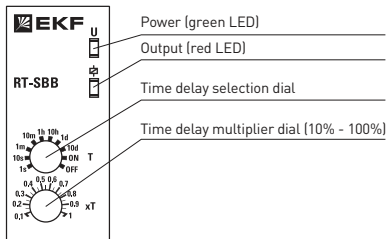

Function diagram




One-shot (NO). After the relay is energized, contacts 15-16 (25-26) open, contacts 15-18 (25-28) close (relay is on), and a countdown (T) is started. Once the countdown is finished, contacts 15-18 (25-28) open and contacts 15-16 (25-26) close (relay is off), remaining in this state until the relay is de-energized.


Setup:

- Install and secure the relay in the intended location.
- Connect the relay as per wiring diagram.
- Energize the relay, the "U" LED will light up green.
- Set the required time ranges.

Wiring diagram



RT-SBB, RT-SBB-12-240



RT-SBB-2, RT-SBB-12-240-2

3 OVERALL AND INSTALLATION DIMENSIONS




Fig. 1

4 OPERATING CONDITIONS

Operating temperature: -5°C to +50°C

Max. altitude above sea level: 2000 m.

5 DELIVERY SCOPE

The time relays are supplied in individual and group package. For all available documentation, scan the QR-code on the insert or on the inside of the package.

6 SAFETY REQUIREMENTS

Do not operate relays with visible mechanical damage.

The relays conform to IEC 61140 Class 0 for protection against electrical shock and must be installed in Class 1 enclosures or higher.

7 MAINTENANCE

The relay must be installed and maintained by qualified personnel. For maintenance, follow national safety rules for operation of electrical installations.

Under normal operating conditions, visually inspect the relay and check the set modes and trigger time every 6 months.

Tighten the screw terminals, as they may become loose due to cyclical changes in the ambient temperature and material flow.

Follow the wiring diagram when installing the relay.

Do not install the relay without protective cover in any area exposed to water or direct sunlight.

8 TRANSPORTATION AND STORAGE

Relays can be transported by any means of enclosed transport that protects the packaged goods from mechanical impact and weather exposure.

Relays shall be stored indoors, in their original packaging, at the ambient temperatures from -25°C to +75°C and max. relative humidity of 80% at +25°C.

9 DISPOSAL

Life-expired and failed products shall be disposed of in compliance with the effective national and local laws and regulations.

To dispose of the product, send it to an authorized company for recycling in compliance with the effective national and local laws and regulations.

10 MANUFACTURER'S WARRANTY

The manufacturer guarantees the relays comply with the declared characteristics, provided that the consumer observes the operation, transportation and storage conditions and requirements.

Warranty period: 7 years from the date of sale specified in the sales receipt. Shelf life: 7 years from the date of manufacture specified on the product package or housing. Service life: 10 years.

Manufacturer: 000 Electroresheniya, Otradnaya st., 2b/9, 127273, Moscow, Russia, tel. +7 [495] 788-88-15.

Importer and EKF trademark service representative:

EKF ELECTRICAL SOLUTION – FZCO, Dubai Silicon Oasis, DDP, Building A2, Dubai, United Arab Emirates, tel. +971-4-547-06-18.

Importer and EKF trademark service representative on the territory of the Republic of Kazakhstan:

TOO «Energoresheniya Kazakhstan», Kazakhstan, Almaty, Bostandyk district, Turgut Ozal st., 247, apt 4.

11 CERTIFICATE OF ACCEPTANCE

The time relay RT-SBB EKF has been manufactured in compliance with the effective laws and regulations and has been approved for operation.

Date of manufacture: for information, refer to the product package.

Quality control stamp

EHF



v3

ekfgroup.com

EKF